

Type

Project

Notes



AP-AV3SAR

Ultra-Thin Profile Square Adjustable Regressed Trim

Housing-free light engine install quickly.

Innovative tilt/swivel design.


Ease of installation, fast-mount features.



IP20
RATED & TESTED

5 YEARS
LIMITED WARRANTY
INCLUDED

TECHNICAL DRAWING

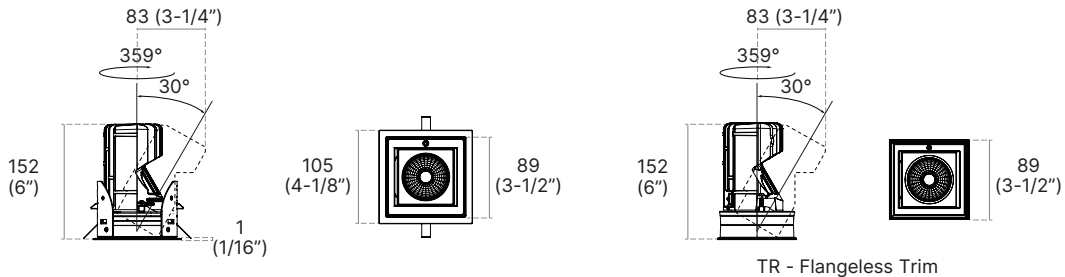

TR - Flangeless Trim

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AP-AV3SAR-AR	AP-AV3RAR-TR
Dimensions	105mm x 105mm x 152mm	89mm x 89mm x 152mm
Power Consumption	14 W, 23 W	14 W, 23 W
Lumen Output	1300-1900 lm	1300-1900 lm
Input Voltage	120-277V AC	120-277V AC
Colour Temperature	2700K, 3000K, 3500K, 4000K, CCT, WD	2700K, 3000K, 3500K, 4000K, CCT, DM
Finish	Gold, Chrome, Brushed Chrome, Matte White, Brushed Nickel, Satin Nickel, Matte Black, Aluminum	Satin Nickel, Matte Black, Aluminum
CRI	Ra90	Ra90
Beam Angle	15° (Spot), 30° (Narrow Flood), 42° (Flood)	15° (Spot), 30° (Narrow Flood), 42° (Flood)
Warranty	5 Years	5 Years

ORDER FORM

1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT	6. BEAM ANGLE	7. DIMMING	8. FINISH						
AP-AV3SAR	AR	105 x 105 x 152	14 14W	A 120-277V AC	27 2700K	35 3500K	CCT Colour Tuning						
	TR	89 x 89 x 152	23 23W		30 3000K	40 4000K	WD Warm Dimming						
6. BEAM ANGLE		7. DIMMING		8. FINISH									
15	15°	42	42°	DM	0-10V Dimming	CH	Chrome	BC	Brushed Chrome	WH	White	GD	Gold
30	30°			TRI	TRIAC Dimming	AL	Aluminum	BN	Brushed Nickel	BK	Black	SN	Satin Nickel

Type

Project

Notes



ADVANT
LIGHTING

OPTIONS & ACCESSORIES

MOUNTING PLATE

Ideal for unfinished basements and other renovation projects.
Choice of Square or Round for 3.5" Remodel housings.
Adjustable mounting bars included.



PA3NW 3.5" Square, 3.5" Round

EMERGENCY DRIVER

Battery life: 120 minutes
Available only for 3.5" and 4" New Construction housings.
Housing Option: **-EM** suffix



EM

STEP-DOWN TRANSFORMER

Available only for 3.5" and 4" Remodel and New Construction housings.



STD-60M 3.5" Square, 3.5" Round

LENSES

Choice of replacement lenses for on-site modification of light diffusion.
Shower Light trims available only with Frosted lens.
*Wall Wash trims available only with Frosted/Frosted lens.



CL Clear



FR Frosted



WW Wall Wash




LN Linear



SL Solite



PR Prismatic



HC Honeycomb



Type

Project

Notes



ADVANT LIGHTING

HOUSINGS




IC AIR TIGHT HOUSING - ROUND

ICAT	6	R	3	V	
1. MODEL	2. HOUSING	3. TYPE	4. SERIES	5. DRIVER	6. PERFORMANCE
ICAT Insulated Housing Air Tight	6 410 x 254 (16" x 10")	R Round	3 3-1/2"	V 120-277V AC	14 14 W 1300 lm 23 23 W 1900 lm



IC AIR TIGHT HOUSING - SQUARE

ICAT	6	S	3	V	
1. MODEL	2. HOUSING	3. TYPE	4. SERIES	5. DRIVER	6. PERFORMANCE
ICAT Insulated Housing Air Tight	6 410 x 254 (16" x 10")	S Square	3 3-1/2"	V 120-277V AC	14 14 W 1300 lm 23 23 W 1900 lm



REMODEL HOUSING

REA	3	S	
1. MODEL	2. SERIES	3. DRIVER	4. PERFORMANCE
REA Remodel Housing	3 3-1/2"	V 120-277V AC	1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT CT: Colour Tuning WD: Warm Dimming



NEW CONSTRUCTION HOUSING

NWA		3	V		
1. MODEL	2. TYPE	3. SERIES	4. DRIVER	5. PERFORMANCE	6. OPTIONS
NWA New Construction Housing	S Square R Round	3 3-1/2"	V 120-277V AC	1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT	EM Emergency Driver (not available with WD and CT)



IC INSULATED HOUSING

ISA		3	V	
1. MODEL	2. TYPE	3. SERIES	4. DRIVER	5. PERFORMANCE
ISA Insulated Housing	S Square R Round	3 3-1/2"	V 120-277V AC	1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT